

ProGrAnalog Corp.
09/21/2023

LoadSlammer Controller for Xilinx Versal ACAP FFEDs

Details

- Powered by a 24V barrel jack and connected by a Mini-B USB.
- Used for testing power delivery to Xilinx Versal devices.
- Plugs into XPOD for Xilinx FFED testing.
- XPOD connects to Xilinx FFED
- Voltage and current measurements are captured for every test taken.
- Both stimuli and measurements are generated and measured with this device.
- Realtime current is displayed on the GUI and via SMB situated on top of the device.
- GUI supports:
 - Automated test suites.
 - Automatic PDF Report generation.
 - Save, file share, and recall of waveforms.
 - Save, file share, and recall of workstations.



What is included in the LSP-Kit-OracADJ-X box:


- OracADJ-X Device
- 3ft USB-A to Mini USB-B Cable
- 24V AC Power Supply

Specifications

Parameter		Min	Typ.	Max	Unit
Timing Characteristics					
Rise Time		270			ns
On Time Range		7.5μ		N/A	Sec
Load Characteristics					
Current Range*		*Determined by FFED package			
Current Resolution*					
Current Output Accuracy			5		%
Input Voltage Rating		0.6		2.0	V
Current Readout Accuracy			5		%
Sampling System					
Sampling Rate				10	MSPS
Bandwidth			5		MHz
Capture Depth			24,000		Points
Channel System		1		5	Channels
Device Connection					
(1) LoadSlammer OracADJ-X will only work with XPOD and Xilinx FFED. (2) LoadSlammer OracADJ-X must only be used with an active Xilinx FFED that has a positive voltage. (3) The USB data connection is non-isolated, this effectively grounds the DUT's ground.					



FFED, OracADJ-X, POD System Block Diagram

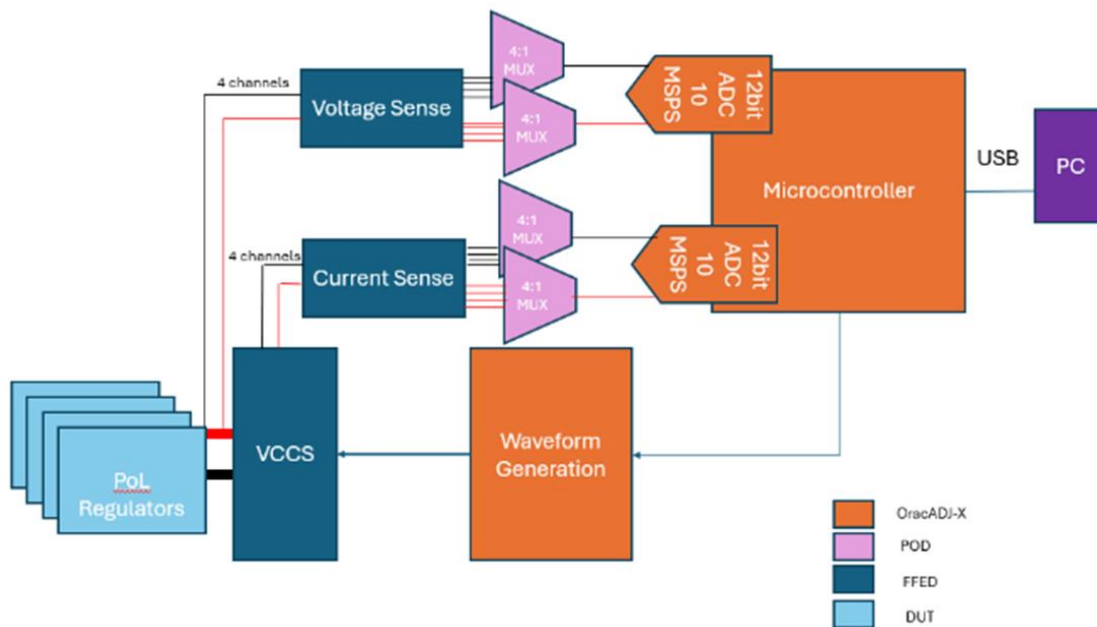

GUI

Transient - PWM and Frequency Sweep


Example VCCINT rail



GUI

Automation - Static & Dynamic Sweep Testing


example shows 4 static, 114 dynamic tests on VCCINT rail

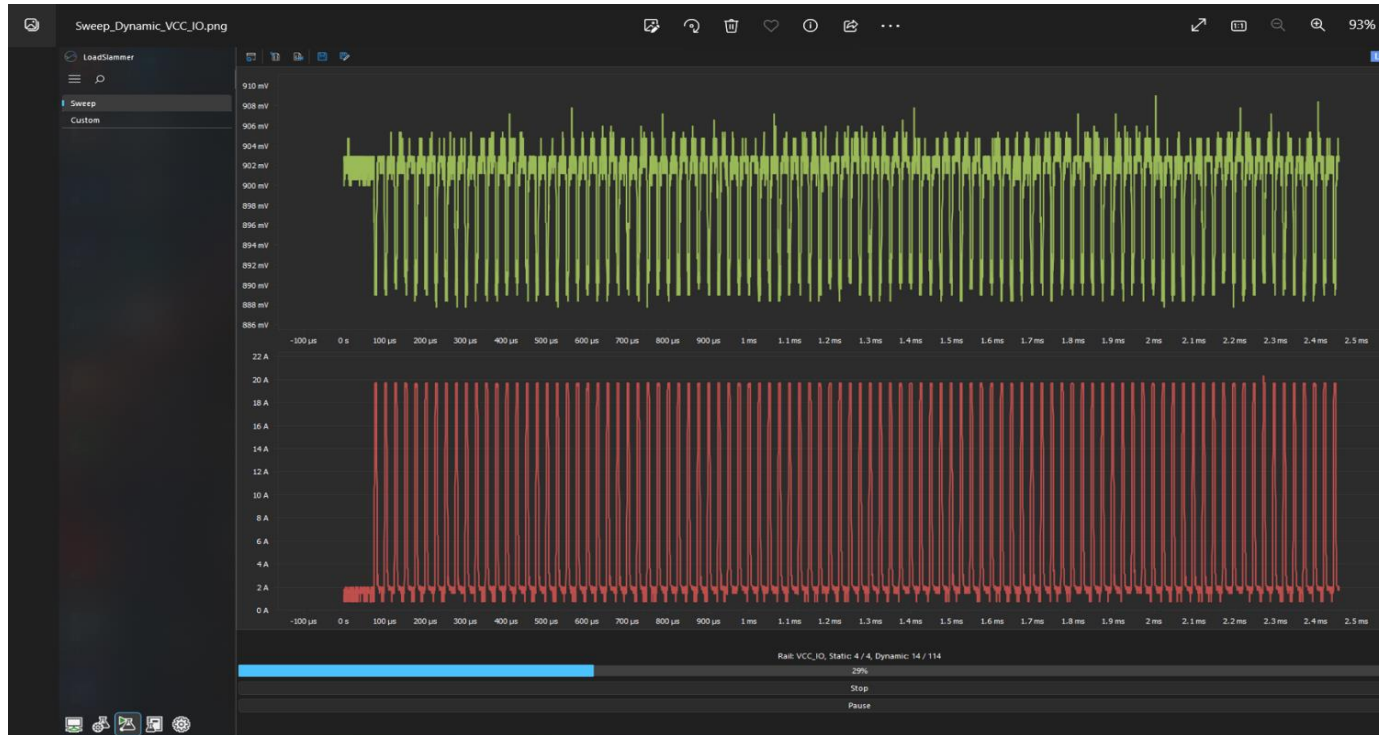

GUI

3D Sweep Results

Example VCCINT at 1.12V

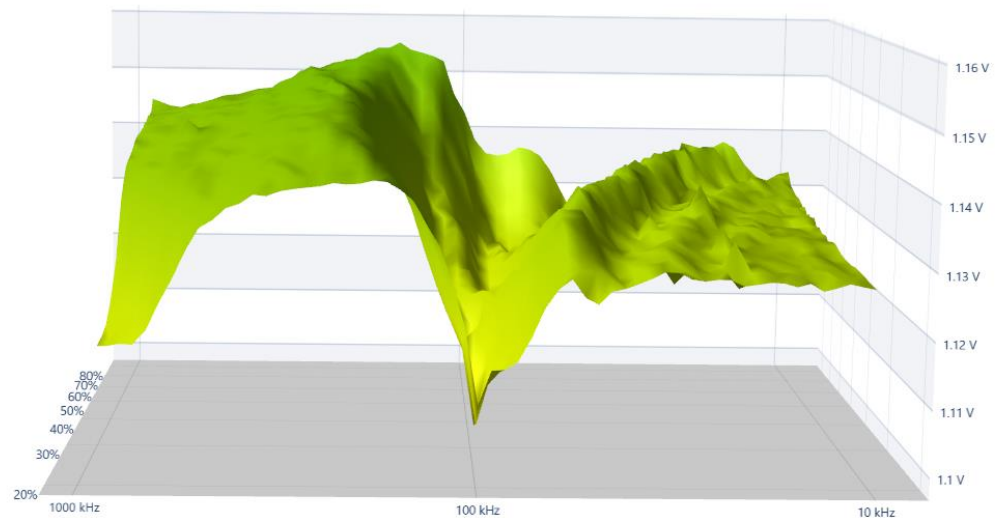

GUI

Automated – Report Generation



Summary

	Pass	Borderline	Fail	Total
VCCINT	118	0	0	118
VCC_IO	118	0	0	118
VCC_SOC	118	0	0	118
VGTY_AVTT	118	0	0	118
Summary Total	100%	0%	0%	472

Test Settings

VCCINT

Tolerance Settings:

Nominal	DC Range	Min AC	Max AC
VID - (IDD * LL_SLOPE)	Nominal $\pm$ 0.02	VID - (EDC * LL_SLOPE) - 0.11	VID +

Marginal Range for Max: 10 %

Marginal Range for Min: 10 %

Load Line Slope: 400 $\mu\Omega$

Dynamic Load Settings:

EDC:	190 A
Max Load Step:	190 A
Max Load Release:	190 A
Duration:	100 ms

Static Load Settings:

Min Current:	0 A
Max Current:	190 A
Step Current:	47.5 A
Duration:	5 s

Max AC: 1.10 V Min AC: 0.70 V Load Line Slope: 400 $\mu\Omega$

Waveform Analysis:

Frequency: 1 kHz Duty Cycle: 25 % EDC: 190 A

Load Step: 190 A Load Release: 190 A Duration: 100 ms



Dynamic Analysis:

Rail Name: VCCINT VID: 0 V Nominal Voltage: 0.90 V


Max AC: 1.10 V Min AC: 0.70 V Load Line Slope: 400 $\mu\Omega$

Frequency	RMS	Min	Max
1 kHz	841.3 mV	773.5 mV	959.1 mV
2 kHz	841.8 mV	774.1 mV	959.7 mV
3 kHz	844.2 mV	773.5 mV	960.3 mV
4 kHz	843.8 mV	773.5 mV	960.9 mV
5 kHz	844.5 mV	772.3 mV	959.7 mV
6 kHz	844.4 mV	771.1 mV	960.9 mV
7 kHz	844.1 mV	770.5 mV	960.9 mV
8 kHz	844.8 mV	770.5 mV	960.9 mV
9 kHz	844.5 mV	770.5 mV	959.7 mV
10 kHz	844.7 mV	770.5 mV	959.7 mV
20 kHz	845.5 mV	775.3 mV	961.5 mV
30 kHz	846.4 mV	775.9 mV	959.7 mV
40 kHz	847.2 mV	775.3 mV	957.3 mV
50 kHz	848.4 mV	775.9 mV	955.4 mV
60 kHz	847.4 mV	775.3 mV	951.8 mV
70 kHz	847.8 mV	775.3 mV	951.8 mV

Dynamic Analysis:

Rail Name: VCCINT VID: 0 V Nominal Voltage: 0.90 V

Max AC: 1.10 V Min AC: 0.70 V Load Line Slope: 400 $\mu\Omega$

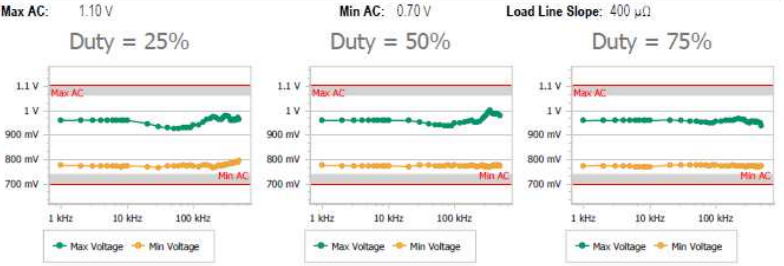

Availability

Mouser part number	ProGrAnalog part number
124-LSP-KITORACADJ-X	LSP-Kit-OracADJ-X

Visit us at:

<https://loadslammer.com>

Questions:

support@progranalog.com



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ProGrAnalog Corp:](#)

[LSP-Kit-OracADJ-X](#)